



Provided by the author(s) and University of Galway in accordance with publisher policies. Please cite the published version when available.

Title	Field assessment of coconut-based activated carbon systems for the treatment of herbicide contamination
Author(s)	McGinley, John; Healy, Mark G.; Scannell, Shane; Ryan, Paraic C.; Harmon O'Driscoll, Jenny; Mellander, Per-Erik; Morrison, Liam; Siggins, Alma
Publication Date	2023-12-03
Publication Information	McGinley, John, Healy, Mark G., Scannell, Shane, Ryan, Paraic C., Harmon O'Driscoll, Jenny, Mellander, Per-Erik, Morrison, Liam, Siggins, Alma. (2024). Field assessment of coconut-based activated carbon systems for the treatment of herbicide contamination. <i>Chemosphere</i> , 349, 140823. doi: https://doi.org/10.1016/j.chemosphere.2023.140823
Publisher	Elsevier
Link to publisher's version	https://doi.org/10.1016/j.chemosphere.2023.140823
Item record	http://hdl.handle.net/10379/17993
DOI	http://dx.doi.org/10.1016/j.chemosphere.2023.140823

Downloaded 2024-05-20T12:43:32Z

Some rights reserved. For more information, please see the item record link above.



1 **Published as: McGinley, J., Healy, M.G., Scannell, S., Ryan, P.C., Harmon**
2 **O'Driscoll, J., Mellander, P.-E., Morrison, L., Siggins, A. 2024. Field assessment**
3 **of coconut-based activated carbon systems for the treatment of herbicide**
4 **contamination. Chemosphere 349: 140823.**
5 **<https://doi.org/10.1016/j.chemosphere.2023.140823>**

6
7 **Field assessment of coconut-based activated carbon systems for the treatment of**
8 **herbicide contamination**

9
10 John McGinley,^{1,2} Mark G. Healy,^{1,2} Shane Scannell,^{1,2} Paraic C. Ryan,^{3,4} Jenny Harmon
11 O'Driscoll,³ Per-Erik Mellander,⁵ Liam Morrison,^{2,6} Alma Siggins.^{2,7*}

12
13 ¹ Civil Engineering, University of Galway, Ireland.

14 ² Ryan Institute, University of Galway, Ireland.

15 ³ Discipline of Civil, Structural and Environmental Engineering, School of Engineering,
16 University College Cork, Ireland.

17 ⁴ Environmental Research Institute, University College Cork, Cork, Ireland

18 ⁵ Agricultural Catchments Programme, Teagasc Environmental Research Centre, Johnstown
19 Castle, Co. Wexford, Ireland.

20 ⁶ Earth and Ocean Sciences, Earth and Life Sciences, School of Natural Sciences, University
21 of Galway, Ireland.

22 ⁷ School of Biological and Chemical Sciences, University of Galway, Ireland.

23 * Corresponding author: alma.siggins@universityofgalway.ie

26 **Abstract**

27

28 Once released into the environment, herbicides can move through soil or surface water to
29 streams and groundwater. Filters containing adsorbent media placed in fields may be an
30 effective solution to herbicide loss in the environment. However, to date, no study has
31 investigated the use of adsorbent materials in intervention systems at field-scale, nor has any
32 study investigated their optimal configuration. Therefore, the aim of this paper was to examine
33 the efficacy of low-cost, coconut-based activated carbon (CAC) intervention systems, placed
34 in streams and tributaries, for herbicide removal. Two configurations of interventions were
35 investigated in two agricultural catchments and one urban area in Ireland: (1) filter bags and
36 (2) filter bags fitted into polyethylene pipes. Herbicide sampling was conducted using
37 Chemcatcher[®] passive sampling devices in order to identify trends in herbicide exceedances at
38 the sites, and to quantifiably assess, compare, and contrast the efficiency of the two intervention
39 configurations. While the Chemcatcher[®] passive sampling devices are capable of analysing
40 eighteen different acid herbicides, only six different acid herbicides (2,4-D, clopyralid,
41 fluroxypyr, MCPA, mecoprop and triclopyr) were ever detected within the three catchment
42 areas, which were also the only acid herbicides used therein. The CAC was capable of complete
43 herbicide removal, when the water flow was slow ($0.5 - 1 \text{ m}^3 \cdot \text{s}^{-1}$), and the interventions spanned
44 the width and depth of the waterway. Overall, the reduction in herbicide concentrations was
45 better for the filter pipes than for the filter bags, with a 48% reduction in detections and a 37%
46 reduction in exceedances across all the sampling sites for the filter pipe interventions compared
47 to a 13% reduction in the number of detections and a 24% reduction in exceedances across all
48 sampling sites for the filter bag interventions ($p < 0.05$). This study demonstrates, for the first
49 time, that CAC may be an effective *in situ* remediation strategy to manage herbicide

50 exceedances close to the source, thereby reducing the impact on environmental and public
51 health.

52

53 ***Keywords:***

54 Herbicides, Chemcatchers[®], Monitoring, Interventions, Water quality, Remediation

55

56 **1. Introduction**

57

58 Herbicides are substances used to control undesired plants, also known as weeds (de Souza et
59 al., 2020; Mojiri et al., 2020; Ighalo et al., 2021). However, extensive and inefficient use of
60 herbicides has led to the contamination of soils and waterways (Khalid et al., 2020; Shahid et
61 al., 2021; Zeshan et al., 2022). Once released into the environment, herbicides can move through
62 soil or surface water to streams and groundwater, where they can accumulate in aquatic
63 organisms as well as causing loss of ecosystem biodiversity (Aksoy et al., 2017; Ramakrishnan
64 et al., 2021; Wenzel et al., 2022). In the European Union (EU), the Council Directive
65 2020/2184 (EU, 2020) on the quality of water intended for human consumption sets the
66 maximum allowable concentration (MAC) for herbicides, either individually or in total, as 100
67 ng.l⁻¹ or 500 ng.l⁻¹ , respectively. However, these values are frequently exceeded (Postigo et
68 al., 2021; EPA, 2022; McGinley et al., 2023). Such exceedances are particularly problematic
69 as conventional water treatment methods are ineffective for the removal of herbicides (Larasati
70 et al., 2021; Intisar et al., 2022; Taylor et al., 2022). While some water treatment facilities
71 incorporate powdered or granulated activated carbon (GAC) filters to remove herbicides (EPA
72 & HSE, 2019; de Souza et al., 2020), this is not common practice in many countries due to
73 prohibitive costs. An alternative approach may involve treatment at the source, i.e., in the field,
74 rather than in a treatment plant. This early intervention for removal of pollutants would
75 positively impact both human and environmental health by reducing herbicide exposure.

76

77 Many low-cost media, based on either raw or pyrolysed waste materials coming from an
78 agricultural or industrial origin, have been used as adsorbents for herbicides (Franco et al.,
79 2021; Jatoi et al., 2021; Taylor et al., 2022). An adsorbent that is often used for herbicide
80 removal is GAC, due to its large surface area (300–2500 m².g⁻¹) and highly microporous

81 structure (Chen et al., 2020; McGinley et al., 2022). In recent years, novel activated carbons,
82 derived from renewable, readily available, low-cost agricultural materials, including canola
83 stalk, orange peel, and coconut husk, have been widely researched in batch adsorption studies
84 (Pandiarajan et al., 2018; Herath et al., 2019; Amiri et al., 2020). Kodali et al. (2021) reported
85 that coconut-based activated carbon (CAC) was a promising adsorbent as it had an adsorption
86 capacity of 103.9 mg.g⁻¹ for the organophosphorus pesticide monocrotophos mainly due to its
87 relatively large surface area of 79.4 m².g⁻¹. However, there is a dearth of field/pilot studies
88 using activated carbon, including CAC, as adsorbents for herbicides. Instead, research work
89 has mainly comprised batch adsorption studies of herbicides using source water,
90 environmentally-relevant aqueous solutions, or spiked samples, which are not representative
91 of realistic field remediation conditions (Carra et al., 2020; Kodali et al., 2021; Singh et al.,
92 2021; Sanz-Santos et al., 2022). Such field/pilot studies would be informative in providing
93 information of the configuration of potential intervention devices and their implementation in
94 waterways.

95

96 Therefore, the aims of this study were to evaluate the extent of exceedances in two agricultural
97 catchments and one urban catchment in Ireland, and using those data to design, install and
98 assess the efficacy of two low cost, CAC-based *in situ* remediation systems capable of
99 herbicide removal close to the source of contamination. Based on these assessments, the
100 questions of whether there is a difference in the configuration of the intervention in herbicide
101 retention and whether the stream flow could impact performance can be addressed.

102


103 **2. Methodology**

104

105 *2.1 Study areas*

106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130

This study examined herbicide exceedances and the efficiency of remediation measures in two agricultural catchments, within the Agricultural Catchments Programme, and one urban catchment in Ireland (Fig. 1). The Corduff catchment (53° 57' 40'' N, 6° 45' 22'' W) is located northwest of Carrickmacross in Co. Monaghan. The site is 578 ha in area, 89% of which is grassland (mainly beef production, with some dairying and sheep), and the remainder used for non-agricultural purposes. The topography of the Corduff catchment ranges from alluvial flatlands to shaped drumlins, with fairly steep slopes and intervening U-shaped valleys. Acid brown earths dominate the hill tops, with stagnic luvisols and gleys on the hill slopes and valley bottoms, and the underlying rock is mainly sandstone. The average daily temperature is 10.1 °C while the average precipitation is 2.6 mm per day. The Dunleer catchment (53° 50' 6'' N, 6° 23' 46'' W) is situated west of Dunleer in Co. Louth. It is 948 ha in area, with 50% in grass (mainly for dairy and beef production), 33% in tillage (mainly winter wheat, but also winter barley, spring barley and potatoes), and the remainder in woodland and non-agricultural uses. The Dunleer catchment is dominated by an undulating landscape, with many slopes. The dominant soils in this catchment are typical and stagnic luvisols, underlain with greywacke, mudstone and limestone geology. The average daily temperature is 10.6 °C while the average precipitation is 2.2 mm per day. The urban site is a drain running through a golf course located in the north west of Ireland. The golf course is a parkland course, which is 46.5 ha in area. The average daily temperature is 11.1 °C while the average precipitation is 3.4 mm per day. Due to a confidentiality agreement, further details on its location are not disclosed. The water network within each of the agricultural catchments (Corduff and Dunleer) confluences and exits the catchment through a single outlet. Each site was instrumented with a weather station, from which the total daily rainfall (mm) was obtained.

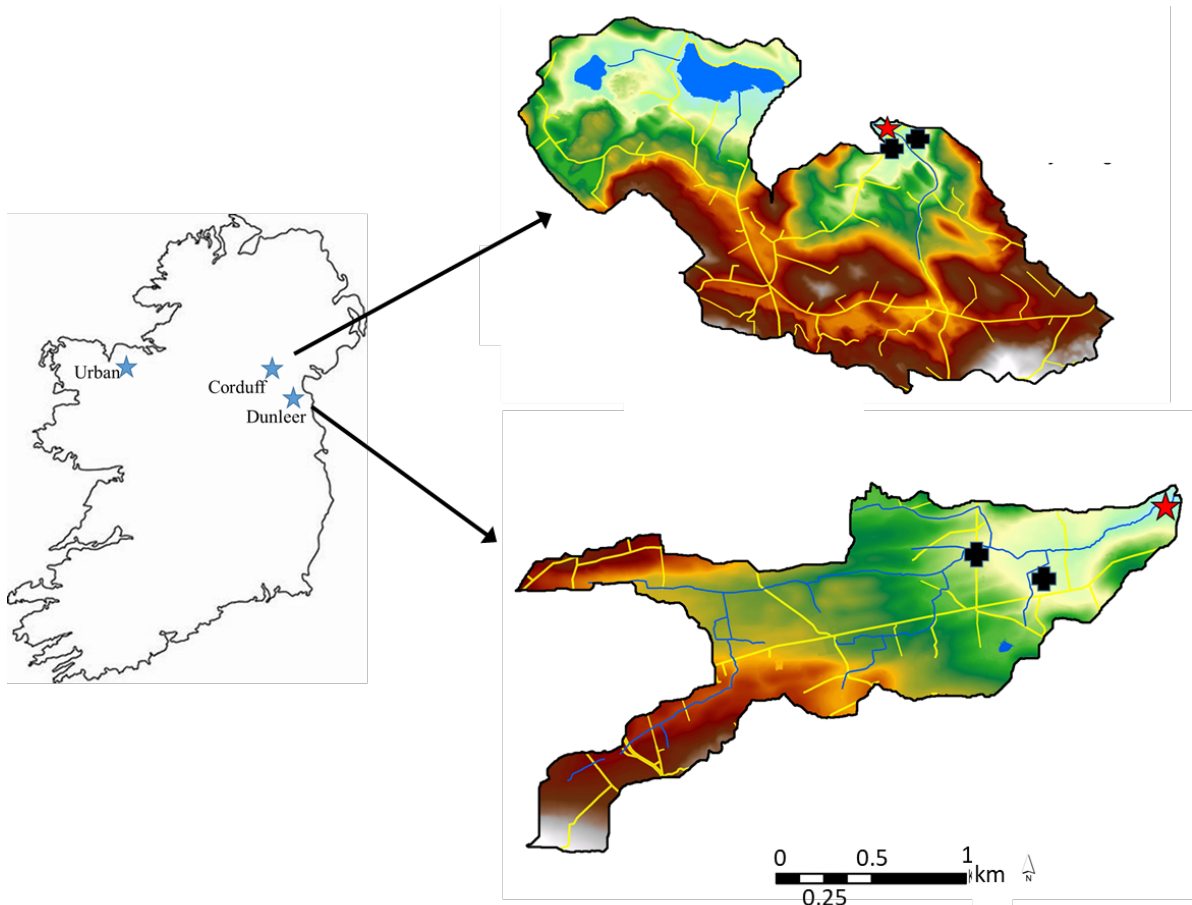

131

132 **Figure 1.** Map of Ireland showing location of the three sampling sites with blue stars. The
 133 outlet points at the two agricultural catchments are denoted with red stars, while the locations
 134 of the interventions in Year 2 are marked with black crosses.

135

136 *2.2 Identification of monitoring locations and interventions used*

137

138 High risk locations for pollution impact potential were identified at the agricultural catchment
 139 sites, based on an online Irish Environmental Protection Agency (EPA) Geographical
 140 Information System (GIS) application that contains information for flow delivery paths (WMS
 141 Layer: “PIP-P Flow Delivery Paths”) and entry points (WMS Layer: “PIP-P Flow Delivery
 142 Points”) for phosphorus (<https://gis.epa.ie/EPAMaps>). As these map layers were primarily
 143 generated based on topography and overland flow, the identified flow delivery paths and entry
 144 points were considered to be likely routes for herbicide movement from land to waterways.
 145 From these delivery paths and points, optimal locations for the placement of the interventions

146 were selected following visual inspection and taking cognisance of physical accessibility and
147 willingness of the farmers to grant access. Two locations were selected for Corduff and
148 Dunleer: in both cases, these locations included a main stream and a tributary upstream (ca.
149 200 m and 1000 m, respectively) of the outlet. One location within the drain, ca. 10 m upstream
150 of the outlet, was used in the Urban site.


151

152 Two configurations of interventions were investigated at each study site. Both configurations
153 used CAC (Nova-Q, Ireland), sieved to a particle size $> 2\text{mm}$, as it had been shown to have a
154 high adsorption affinity ($>97\%$) for acid herbicides (McGinley et al., unpublished work). One
155 configuration used filter bags (2 mm netten 400G bags, $100 \times 40\text{ cm}$; Triskell Seafood, Ireland)
156 containing 16 kg of CAC (hereafter referred to as “filter bags”). The second configuration used
157 the same filter bags, but in this case they were filled with 12 kg of sieved CAC, and fitted into
158 a polyethylene pipe ($0.3\text{ m wide} \times 0.8\text{ m long}$) to fill the full diameter of the centre 0.4 m
159 section of the pipe (hereafter referred to as “filter pipe”) (Fig. 2). At each intervention site,
160 three staggered filter bags were placed perpendicular to the flow of the water, in order to
161 maximise contact of the media with the water but not cause flooding (Fig. 2). Just downstream
162 of the filter bags, the filter pipe was placed in line with the flow of the water, so an aliquot of
163 water passed through the filter. The filter pipe was not placed in parallel with the filter bags,
164 due to the width constraints of the streams and drains, which required sequential placement of
165 the systems. The impact of placing the filter pipe after the filter bags was expected to be
166 minimal as pesticide concentrations were measured before and after each system.

167

168

169

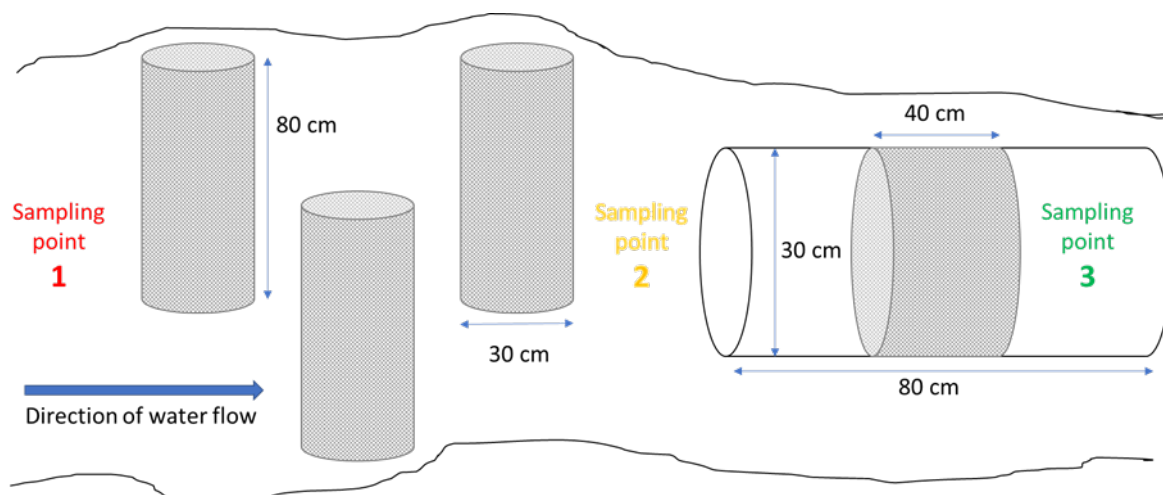

170



171 **Figure 2.** Schematic of different configurations of the intervention positioned in the stream.
172 The blue arrow indicates direction of water flow. Filter bags are upstream from the filter pipe.
173 Sampling points, colour-coded (see Section 2.4), are also indicated on the scheme. Photo shows
174 actual configurations in one of the streams, with first bag of three in the top left hand corner of
175 photo.

176

177 2.3 SEM microscopy and CAC characterisation

178

179 A Hitachi S4700 Scanning Electron Microscope (SEM, Hitachinaka, Japan) equipped with a
180 Bruker X-Flash EDX detector was used to image gold-coated (Emitech K550) samples of the
181 CAC and to determine its elemental composition. The analyses were performed at an
182 acceleration voltage of 15 kV, and a working distance of 11 - 12 mm. Physical and

183 morphological analyses of the CAC, including pore volume, pore diameter and surface area,
184 were carried out by Glantreo Ltd (Cork, Ireland).

185

186 *2.4 Herbicide sampling and analysis*

187

188 Herbicide sampling was carried out using Chemcatcher[®] passive sampling devices that were
189 placed in the water, in duplicate, for two-week periods. For both years 1 (2021) and 2 (2022),
190 monthly herbicide sampling was conducted at the outlet of each of the three sites from April to
191 October. In Year 2, additional monthly herbicide sampling was undertaken to assess the
192 efficiency of the two intervention configurations at three sampling locations: (1) immediately
193 (< 1m) upstream of the filter bag interventions (red sampling point 1 in Fig. 2), (2) between the
194 filter bags and the filter pipe (yellow sampling point 2 in Fig. 2), and (3) within the filter pipe
195 (green sampling point 3 in Fig. 2), downstream of the adsorbent. This allowed for determination
196 of the herbicide removal by each of the intervention configurations independently, where the
197 concentration difference between sampling points 1 and 2 indicated removal by the filter bags,
198 and the difference between sampling points 2 and 3 indicated removal by the filter pipe.

199

200 Details on the preparation of the Chemcatchers[®] have been previously reported (Grodtko et al.,
201 2021; Taylor et al., 2022). During each deployment, an additional Chemcatcher[®] was exposed
202 to serve as a blank at each site, so that any contamination occurring during deployment of the
203 devices could be readily identified. Once retrieved from the water, they were stored at 4 °C
204 prior to being disassembled for removal of the filter disk. When dry, the herbicides were
205 extracted from the disks with 25 ml of a 9:1 ethyl acetate/formic acid mixture.
206 Chromatographic separation was carried out on a C18 LC Column using a Thermo scientific
207 Dionex UlitMate 3000 system equipped with a binary pump, a vacuum degasser and an

208 autosampler. The column oven was maintained at 25 °C. Samples were analysed using a
209 Thermo scientific Exactive Plus LC-MS Orbitrap® mass spectrometer. TraceFinder 4.1 EFS
210 LC software was used for data acquisition and analysis.

211

212 *2.5 Statistical analysis and assessment of groundwater contamination potential*

213

214 MS Excel™ 2016 was used for all statistical analysis, including calculations of the means and
215 standard error of replicated herbicide data, and the analysis of the variance. Data were initially
216 tested to determine the normality and homogeneity of variances. A one-tailed *t*-test was used
217 to determine statistical significance of the reduction of herbicide concentration by the
218 interventions. Results were considered significant at $p \leq 0.05$.

219

220 For a preliminary assessment of groundwater contamination potential, the Groundwater
221 Ubiquity Score (GUS) was estimated using Eq. (1),

$$222 \text{GUS} = \log(T_{1/2}) \times (4 - \log(K_{OC}))$$

223 where $T_{1/2}$ is the half-life of the pesticide and K_{OC} is the organic-water carbon partition
224 coefficient (Gustafson, 1989).

225

226 **3. Results and Discussion**

227

228 *3.1 Outlet monitoring*

229

230 At each study location, a suite of eighteen acid herbicides were analysed (limit of detection
231 (ng.l⁻¹) is given in brackets): 2,3,6-trichlorobenzoic acid (3.571); 2,4-D (0.446); 2,4-DB
232 (2.143); 2,4,5-T (0.5); benazolin (5.714); bentazone (5); bromoxynil (5); clopyralid (1.623);

233 dicamba (2.435); dichlorprop (0.478); fenoprop (0.714); fluroxypyr (0.978); MCPA (1.325);
234 MCPB (1.728); mecoprop (0.759); pentachlorophenol (1.429); picloram (1.429) and triclopyr
235 (0.876). The acid herbicides used and detected across the locations were 2,4-D, clopyralid,
236 fluroxypyr, MCPA, mecoprop and triclopyr. Table 1 shows the minimum, maximum, mean
237 and frequency of detection of the detected herbicides at the catchment outlets over the two-
238 year study period. In total, 298 detections of individual herbicides were recorded across all
239 three outlets, of which 131 were over the MAC of 100 ng.l⁻¹ (EU, 1998). The MAC of 500 ng.l⁻¹
240 ¹ (EU, 1998) for total cumulative herbicides was exceeded on 38 occasions (Table 1).
241

242 **Table 1.** Minimum, maximum and mean concentrations and frequency of detection of the studied herbicides at the outlet points in the sampling
 243 areas.
 244

Outlet	Herbicide	Year 1					Year 2				
		Concentration (ng.l ⁻¹)			Frequency		Concentration (ng.l ⁻¹)			Frequency	
		Min	Max	Mean	Detection (%) ^a	Exceedance (%) ^b	Min	Max	Mean	Detection (%) ^a	Exceedance (%) ^b
<i>Corduff</i>	2,4-D	5.02	23.61	10.81	5 (36)	0 (0)	39.29	47.10	39.89	4 (29)	0 (0)
	Clopyralid	21.11	86.04	42.61	8 (57)	0 (0)	14.61	108.77	47.89	4 (29)	1 (7)
	Fluroxypyr	3.43	968.2	200.22	12 (86)	6 (43)	2.45	29.84	12.23	5 (36)	0 (0)
	MCPA	4.67	33973.96	4513.81	14 (100)	6 (43)	5.01	245.33	96.72	11 (79)	4 (29)
	Mecoprop	1.01	4.68	2.33	3 (21)	0 (0)	0	0	0	0 (0)	0 (0)
	Triclopyr	36.86	1630.66	230.51	10 (71)	4 (29)	41.71	131.94	83.84	5 (36)	2 (14)
	Total	111.69	34147.15	4878.79	14 (100)	5 (36)	2.45	357.13	135.38	14 (100)	0 (0)
<i>Dunleer</i>	2,4-D	4.52	2008.04	261.75	14 (100)	5 (36)	28.12	1675.22	449.80	14 (100)	10 (71)
	Clopyralid	28.41	1349.84	427.11	10 (71)	7 (50)	21.92	386.36	125.44	11 (79)	4 (29)
	Fluroxypyr	156.56	1215.75	358.19	13 (93)	13 (93)	43.05	3593.44	949.12	14 (100)	11 (79)
	MCPA	3.05	724.37	118.38	9 (64)	2 (14)	12.15	1540.55	474.21	14 (100)	10 (71)
	Mecoprop	4.55	81.61	16.38	10 (71)	0 (0)	4.84	47.25	15.84	6 (43)	0 (0)
	Triclopyr	106.47	1139.08	426.67	10 (71)	10 (71)	13.34	772.78	173.92	10 (71)	3 (21)
	Total	364.63	4356.87	1295.66	14 (100)	11 (79)	174.31	5712.19	2104.26	14 (100)	12 (86)
<i>Urban</i>	2,4-D	9.88	319.81	100.76	12 (86)	4 (29)	6.64	6697.88	2488.47	14 (100)	10 (71)
	Clopyralid	7.31	819.81	271.79	8 (57)	4 (29)	1070.62	1070.62	1070.62	1 (7)	1 (7)
	Fluroxypyr	5.38	113.50	44.81	9 (64)	2 (14)	6.36	384.54	103.29	8 (50)	2 (14)
	MCPA	5.47	155.99	47.64	10 (71)	2 (14)	5.07	41.13	18.84	9 (64)	0 (0)
	Triclopyr	19.14	5057.55	1358.89	8 (57)	6 (43)	9.84	2629.58	760.39	7 (50)	2 (14)
	Total	33.34	5259.4	1228.00	12 (86)	4 (29)	37.84	9317.88	3016.79	14 (100)	6 (43)

245 ^a Number of positive samples with percentage of positive samples from a total number of 14 sampled in parentheses.



246 ^b Number of exceedances (MAC = 100 ng.l⁻¹ for individual herbicides and 500 ng.l⁻¹ for total herbicides), with percentage of exceedances from a total of 14 sampled in
 247 parentheses.
 248

249 At the three sites, the most frequent herbicide exceedances at the outlets over both
250 years were, from highest to lowest, fluroxypyr (n = 34), 2,4-D (n = 29), triclopyr (n =
251 27), and MCPA (n = 24). Herbicide persistence is categorised by DT₅₀ values, which
252 is the time required for the chemical concentration under defined conditions to decline
253 to 50% of the amount at application. The DT₅₀ values of the detected herbicides ranges
254 from 3 days (fluroxypyr) to 28.8 days (2,4-D) under field conditions (Lewis et al.,
255 2016). All of the herbicides detected in the current study were categorised as non-
256 persistent (defined as having a DT₅₀ <30 days; Silva et al., 2019). There are two
257 potential reasons why these herbicides were detected: (1) the detection of the
258 herbicides in the waterways can be attributed to their desorption from soils or
259 sediments, where they may have accumulated during previous applications (Postigo
260 et al., 2021; McGinley et al., 2023), and (2) the detection can be indicative of recent
261 herbicide application. DT₅₀ values do not consider the organic carbon-water
262 partitioning coefficient (K_{OC}) of herbicides, so a more accurate parameter to use when
263 considering herbicide movement from soil to water would be the Groundwater
264 Ubiquity Score (GUS) leaching values. The GUS score is an indicator of the potential
265 leaching of a chemical into groundwater, based on the herbicides K_{OC} and DT₅₀
266 (Gustafson, 1989), and is one of the most widely used indicators for herbicide leaching
267 from soil to water. A value above 2.8 indicates that the herbicide is a potential leacher,
268 below 1.8 indicates non-leacher, and those between 1.8 and 2.8 represents moderate
269 mobility in soil or a transition between leacher and non-leacher (Gustafson, 1989).
270 The GUS scores of 2,4-D, MCPA, and triclopyr are >2.8 (Table S1), indicating that
271 they are potential leachers, while fluroxypyr was <1.8, indicating that it was a non-
272 leacher. This implies that 2,4-D, MCPA and triclopyr are more likely to be found in
273 waterways than in soils, while the opposite would be the case for fluroxypyr. This

274 further suggests that, particularly in the case of fluroxypyr, the detection of the
275 herbicide in the waterways was due to recent application. This is in agreement with
276 the work of Prosser et al. (2020), who reported that surface run-off following rain
277 events, which is one of the main drivers for herbicide discharge from soil to
278 waterways, occurs mainly with soils having low porosity and low water draining
279 capacity. Given the prevalence of slopes within the topography of both Corduff and
280 Dunleer, surface run-off is a likely pathway for herbicide transport from the
281 application site to these water courses. Overall, the balance between the impact of
282 topography and GUS index must be considered, as the GUS index does not take into
283 account electrostatic interactions, and may not fully correlate with the observed
284 mobility of herbicides (Butkovskyi et al., 2021).

285

286 Fig. 3 shows the exceedances at the outlets, as well as the rainfall over the two-year
287 sampling period. The majority of the exceedances occurred during April to June of
288 each year, with several also observed in early autumn (September/October). This
289 corresponds with the application times for herbicides, which should occur in early to
290 mid-spring of each year, when there is rapid growth of the weeds, as well as in early
291 autumn, at which point the weeds are transporting food from their foliage to their roots
292 in preparation for the winter (Turf and Till, 2023). The herbicides that showed
293 exceedances are used to control broadleaf weeds, as well as rushes and thistles. They
294 are commonly used on grasslands and where cereal crops are grown (Lewis et al.,
295 2016), and would be expected to be found at the both the Corduff and Dunleer sites,
296 as well as a recreational space such as the urban golf course site. Table S2 shows the
297 optimal spraying time and conditions for the herbicides with exceedances found at the
298 outlets.

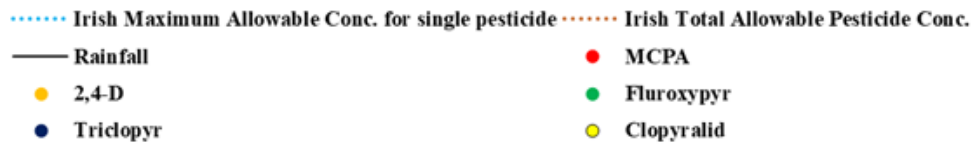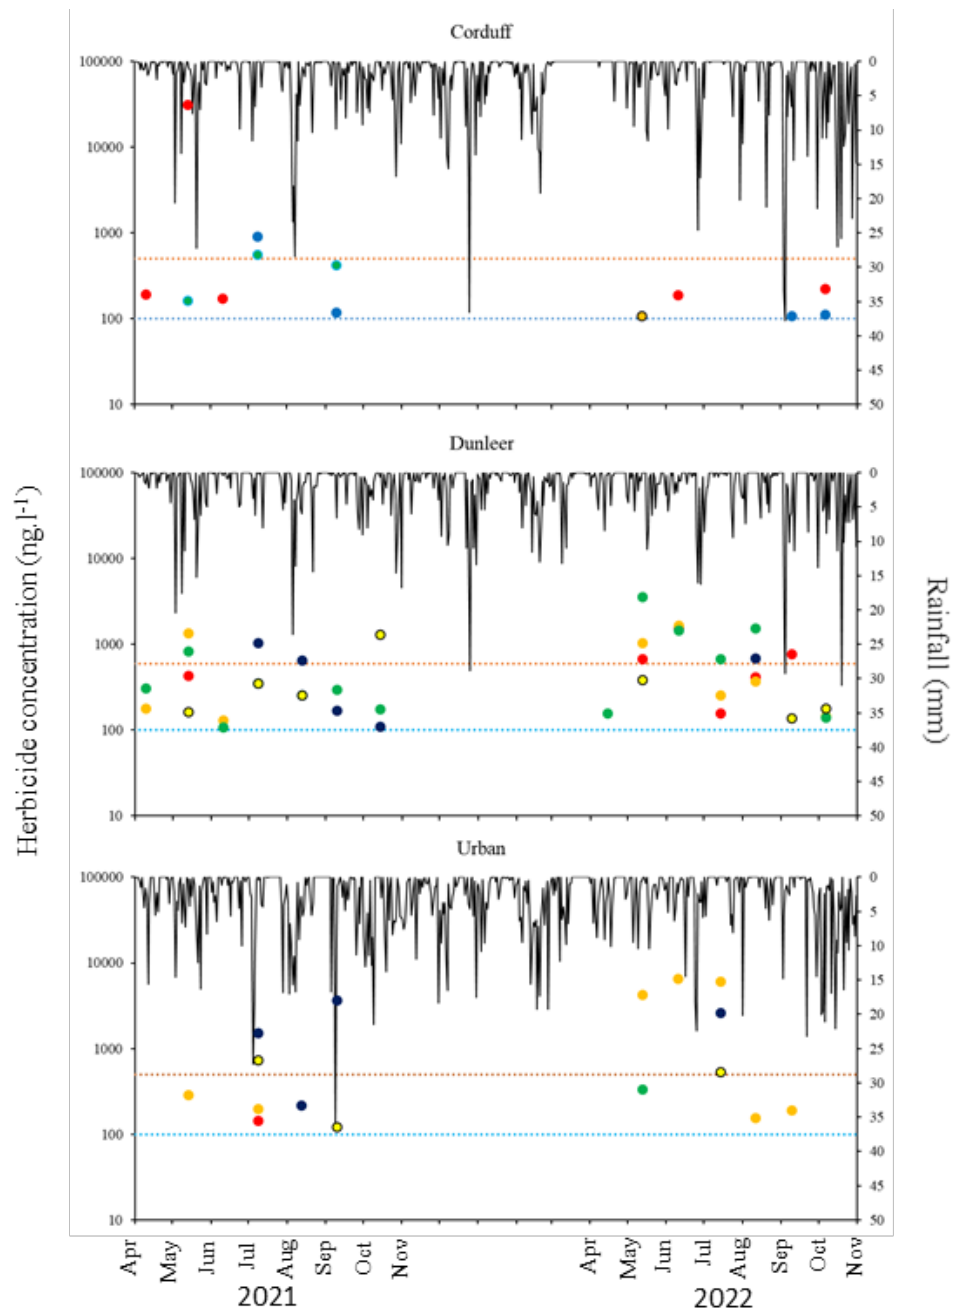

299

300 **Figure 3.** Exceedances of herbicides at outlet points in Corduff, Dunleer and Urban
 301 sampling areas for Year 1 (2021) and Year 2 (2022) of the study.
 302

303 The rainfall distribution was similar between the Corduff and Dunleer catchments, but
 304 different for the Urban site (Fig. 3), which was not surprising given that the latter was
 305 located in the west of Ireland (Fig. 1). The average rainfall for the Belmullet weather

306 station in Co. Mayo (on the west coast of Ireland) was 1258.9 mm.y⁻¹, while that for
307 Dublin Airport (on the east coast of Ireland) was 607.6 mm.y⁻¹ (Met Éireann, 2023).
308 In all cases, where rainfall exceeded 15 mm.day⁻¹, the concentrations of herbicides
309 detected at the outlets greatly exceeded the MAC value of 100 ng.l⁻¹. This supports
310 evidence that heavy rainfall triggers an increase in overland flow, causing loss of
311 applied herbicides and the subsequent contamination of surface waterways (Khan et
312 al, 2020; Prosser et al, 2020; Liu et al., 2021).

313

314 *3.2 Media characterisation*

315

316 We have previously shown, in a laboratory setting, that GAC is capable of removal of
317 the herbicides, 2,4-D, fluroxypyr, MCPA, mecoprop-P and triclopyr, from aqueous
318 solutions with >95% removal reported (McGinley et al., 2022). We have also found
319 that CAC is as efficient at removal of the same suite of herbicides as GAC, with >97%
320 removal observed (McGinley et al., unpublished work). The surface of the GAC was
321 not smooth but, instead, had small clusters distributed over smooth platelets (Fig. S1a
322 and b). The surface of CAC, on the other hand, was smooth, with visible indentations
323 in the surface (Fig. S1c and d). Adsorbent materials can be categorised according to
324 pore size distribution, as macroporous (>50 nm), mesoporous (2-50 nm) or
325 microporous (<2 nm) (Feng et al, 2022; Gao et al., 2023). Mesoporous materials have
326 large specific surface areas (>500 m².g⁻¹; Xu et al., 2020; Plohl et al., 2021;
327 Kouchakinejad et al., 2022), which facilitate the adsorption of guest molecules. GAC
328 is at the lower end of the mesoporous range, with a pore diameter of ca. 6 nm, resulting
329 in a high surface area (579 m².g⁻¹) and a high pore volume (ca. 0.496 cm³.g⁻¹), which
330 is optimal for adsorption (McGinley et al., 2022). On the other hand, CAC has a lower

331 surface area ($10.52 \text{ m}^2 \cdot \text{g}^{-1}$) and pore volume ($0.028 \text{ cm}^3 \cdot \text{g}^{-1}$) than GAC, which would
332 suggest reduced adsorption capacity. However, CAC has a larger pore diameter than
333 GAC (ca. 14.5 nm), which would better facilitate herbicide adsorption. Full media
334 characterisation for CAC is given in Table S3 while the full characterisation of GAC
335 has been previously reported (McGinley et al., 2022). EDX imaging of GAC and CAC
336 are shown in Fig. S1e and f. While both materials primarily contained carbon and
337 oxygen, GAC also contained the elements aluminium silicon, sodium and titanium,
338 while CAC also contained calcium. As CAC and GAC had comparable abilities to
339 adsorb herbicides, but as CAC was more cost-effective than GAC, it was selected as
340 the adsorbent for the interventions in Year 2.






341

342 *3.3 Herbicide removal by filter bag configuration*

343

344 Fig. 4 shows the herbicide detections before and after the filter bags at each site,
345 thereby indicating the ability of the filter bags to remove the herbicides investigated,
346 while Table S4 (a-c) shows the minimum, maximum, mean and frequency of detection
347 of the herbicides detected before and after the filter bags in the three sampling areas.
348 In Corduff stream, there were 31 detections of herbicides and one exceedance before
349 the filter bags, compared to 29 detections of herbicides and three exceedances after
350 the filter bags (Fig. 4a; Table S4a), while in Dunleer stream, there were 17 detections
351 of herbicides and no exceedances before the filter bags, compared to 22 detections of
352 herbicides and no exceedances after the filter bags (Fig. 4b; Table S4b). In the majority
353 of samples from the Corduff and Dunleer streams, the concentrations of the herbicides
354 before the filter bags was less than the MAC of $100 \text{ ng} \cdot \text{l}^{-1}$. Overall, in the two streams,
355 there was a slight, but not statistically significant ($p > 0.05$), decrease in the average

356 concentrations detected after the filter bags, with a reduction of 24% and 17% in
357 Corduff and Dunleer streams across all measured herbicides (Fig. 4a and b; Table S4a
358 and b). Incomplete removal of the herbicides is probably due to the wide body of water
359 (< 1m in width) in both streams, which meant that a single filter bag could not span
360 the stream. Although the three filter bags were put in a staggered position, there was
361 still room for the water to flow around the filter bags, rather than passing through the
362 adsorbent material. This ability to circumvent the filter bags could account for the
363 incomplete removal of herbicides by this configuration. It is possible that what is
364 causing the increases in herbicide detections is sediment particulate matter that has
365 pesticides adsorbed to it, circumventing the first Chemcatcher[®] and intervention, but
366 being picked up by the post-intervention Chemcatcher[®]. So, it is not dissolved
367 pesticides, but an outlier of some kind.

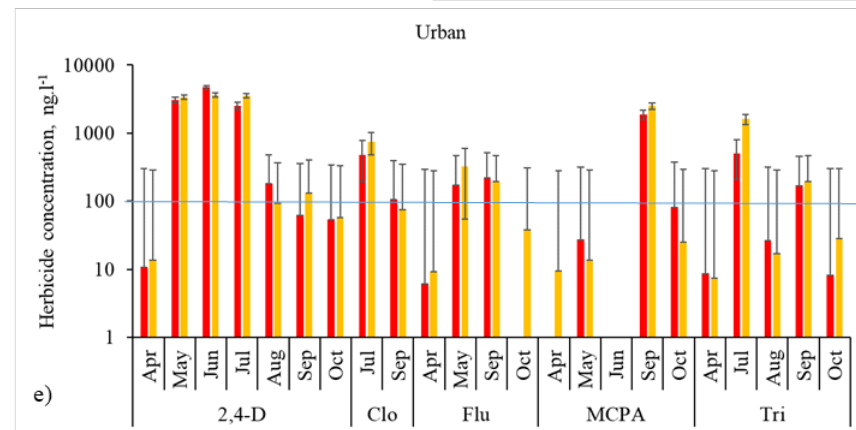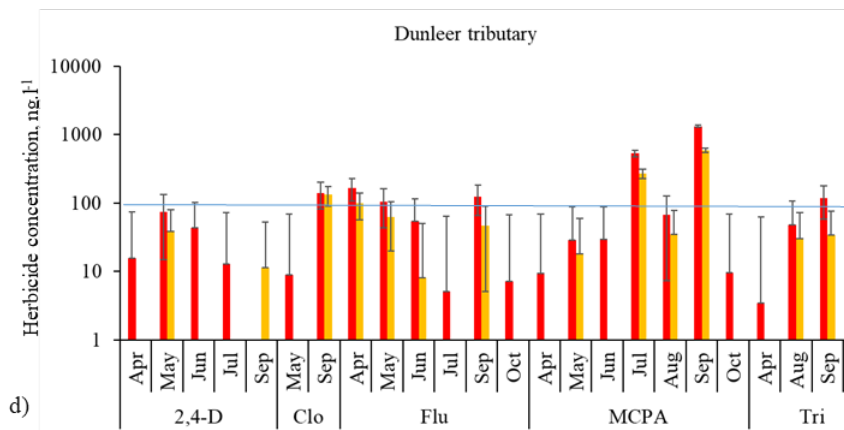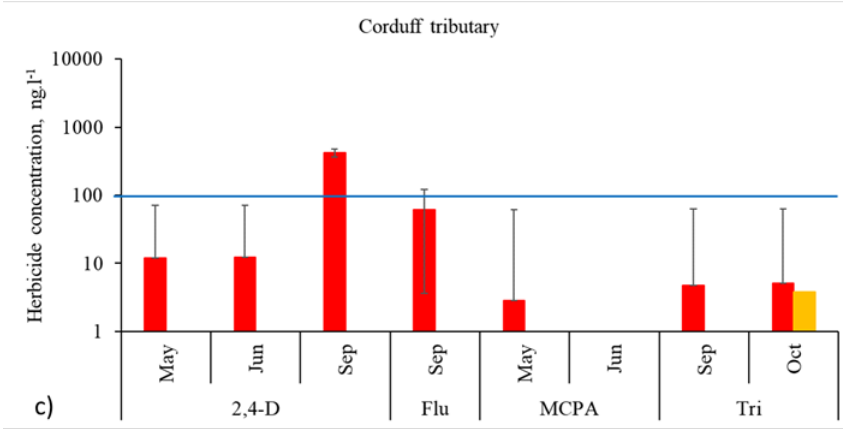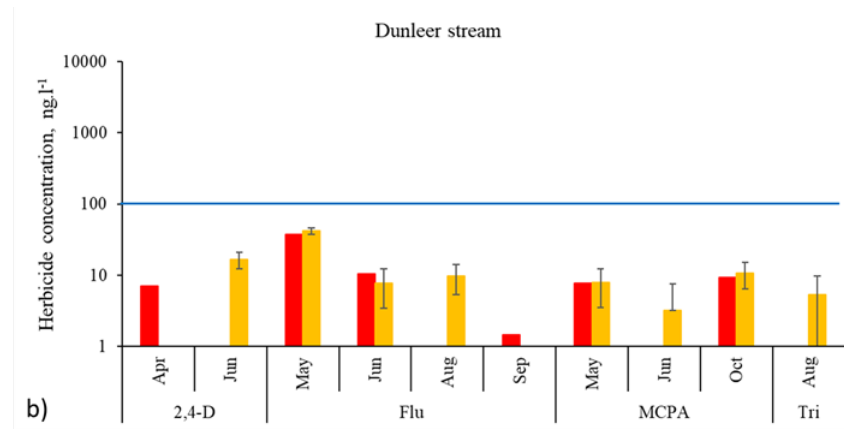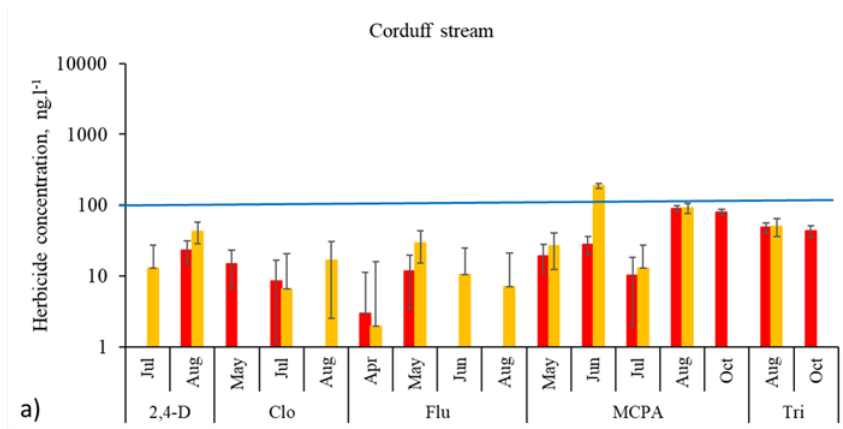

369 **Figure 4.** Herbicide detections for the filter bag interventions across all sampling areas. Clo = clopyralid, Flu = fluroxypyr and Tri = triclopyr.
370 Red columns indicate herbicide concentrations before the filter bag interventions, and yellow columns indicate herbicide concentrations after the
371 filter bag interventions. Average values of the two Chemcatchers[®] have been displayed for each monthly detection. Error bars show standard error
372 where n = 2. The blue line is the maximum allowable concentration for individual herbicides (100 ng.l⁻¹).
373

374 In the Corduff tributary, there were 12 detections of herbicides and three exceedances
375 before the filter bags, compared to one detection of herbicides and no exceedances
376 after the filter bags (Fig. 4c; Table S4a). The filter bags were very effective in the
377 Corduff tributary (average 89% reduction, $p > 0.05$), with only one detection of
378 triclopyr after the filter bags, which was below the MAC of 100 ng.l^{-1} (Fig. 4c; Table
379 S4a). There was a complete removal of 2,4-D from an average initial concentration of
380 422.6 ng.l^{-1} (Fig. 4c; Table S4a), indicating that the CAC adsorbent was capable of
381 dealing with incoming herbicide concentrations up to 500 ng.l^{-1} . Zafra-Lemos et al.
382 (2021) reported that coconut-based activated carbon completely removed the
383 herbicide 2,4-D, at a concentration of 10 mg.l^{-1} , from water, but no pilot-scale
384 experiments were undertaken. Two possible reasons for this complete removal were
385 (1) the low level of water that was present in the tributary, with the level of water never
386 rising above 0.15 m over the base of the stream from April to October, and (2) the
387 tributary was also only 0.40 m wide at its widest point, so that the bag interventions
388 completely filled the path of the stream, thereby forcing the polluted water through the
389 CAC-filled bags and allowing time for the adsorption of the herbicides to occur. The
390 height of the filter bags was approximately 0.15 m, which meant that the water could
391 not flow over the bags. Furthermore, the flow of water in the tributary was quite slow,
392 so that the water had time to flow through the bag and allow adsorption to take place.
393

394 In the Dunleer tributary (Fig. 4d; Table S4b), the number of detections before the filter
395 bags was 56, of which seventeen were exceedances, while after the bags, there were
396 39 detections and eight exceedances. At the Dunleer tributary, the filter bags were
397 effective for herbicide removal on the majority of occasions (an average reduction
398 across all herbicides of 67.1%; Fig. 4d), with either minimal or no detections of the

399 herbicides observed after the bags ($p > 0.05$). However, for MCPA in July and
400 September, the incoming concentrations of 536.8 and 1334 ng.l⁻¹, respectively, were
401 reduced to 270.1 and 593.7 ng.l⁻¹, which were considerably above the MAC. This
402 would suggest that the CAC adsorbent does not have the capacity to deal with very
403 high concentrations of herbicides in the waterways. The tributary was also slow
404 moving and the filter bags were able to almost completely span the width of the
405 waterway, with only a few centimetres on either side available for the water to
406 circumvent the filter bags.

407

408 The number of herbicides detected in the Urban area before the filter bags was 53, of
409 which 29 were exceedances, while after the bags, there were 56 detections and 27
410 exceedances (Fig. 4e; Table S4c). Across all herbicides measured in the Urban area,
411 there was no significant difference ($p > 0.05$) between detections before and after the
412 filter bags (Fig. 4e; Table S4c). The water was slow moving, which helped the removal
413 of the herbicide by the treatment system. However, the drain was over 1 m in depth,
414 and the water level was consistently >0.5 m, even during the summer months. This
415 reduced the amount of water that was passing through the filter bags and making
416 contact with the CAC material. Overall, the filter bags reduced the exceedances from
417 $n=50$ to $n=38$ (Tables S4(a-c)).

418

419 Based on these observations, the filter bags adsorbed the herbicides most efficiently
420 when the water flow was slow, the filter bags spanned the entire width of the waterway
421 and the water level present in the waterway was lower than the height of the filter bags.
422 In the cases where the water covered the filter bags, or where the water can easily
423 bypass above or around the bags, then the filter bags did not reduce the herbicides






424 concentrations as effectively. Fig. 4 also shows that, where the concentrations of
425 herbicides before the bags are $<500 \text{ ng.l}^{-1}$, then the media are better able to remove
426 those herbicides completely in the majority of cases. However, where the
427 concentrations exceed 500 ng.l^{-1} , particularly in the case of the Urban area, then
428 complete adsorption is more difficult to achieve.

429

430 *3.4 Herbicide removal by filter pipe configuration*

431

432 Fig. 5 shows the herbicide detections before and after the filter pipes at each site,
433 indicating the ability of the filter pipe to remove the herbicides under investigation,
434 while Table S4 (a-c) shows the minimum, maximum, mean and frequency of detection
435 of the detected herbicides before and after the filter pipes in the three sampling areas.
436 The filter pipes typically had a lower influent concentration as the water had already
437 passed through the filter bags. In the Corduff stream (Fig. 5a; Table S4a), there were
438 29 detections of herbicides before the filter pipes, of which 3 were exceedances, which
439 were reduced to 14 detections and no exceedances after the filter pipes, while in
440 Dunleer stream (Fig. 5b; Table S4b) there were 22 detections and no exceedances
441 before the filter pipes, which were reduced to 5 detections and no exceedances after
442 the filter pipes. Except for the case of the detection of MCPA at the Corduff stream,
443 the concentrations of the herbicides before the filter pipes in both Corduff and Dunleer
444 streams were below the MAC of 100 ng.l^{-1} . Overall, in the two streams, there was a
445 large, statistically significant ($p < 0.05$), decrease in the concentrations of herbicides,
446 with an average reduction of 83% and 88%, respectively, across the herbicides
447 measured (Fig. 5a and b). These reductions included a 95% reduction for MCPA from
448 186.9 ng.l^{-1} to 8.4 ng.l^{-1} in the Corduff stream (Fig. 5a).

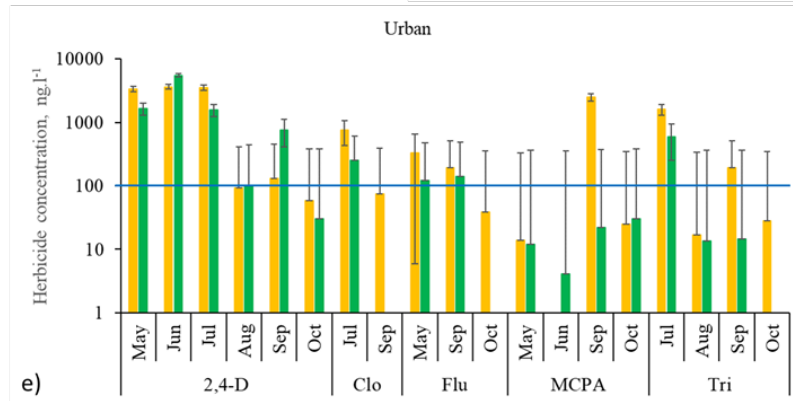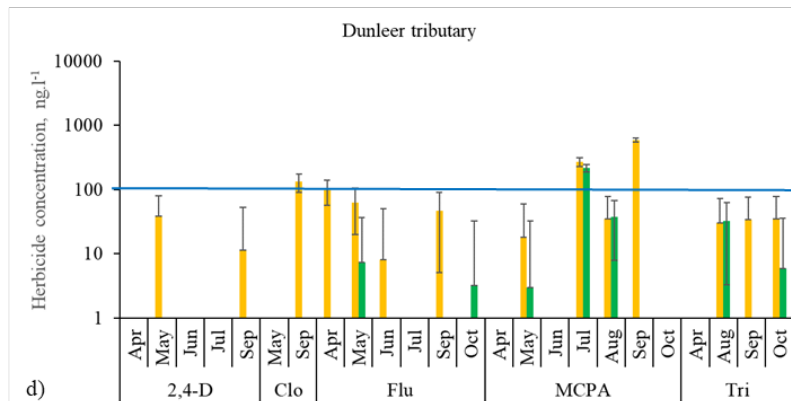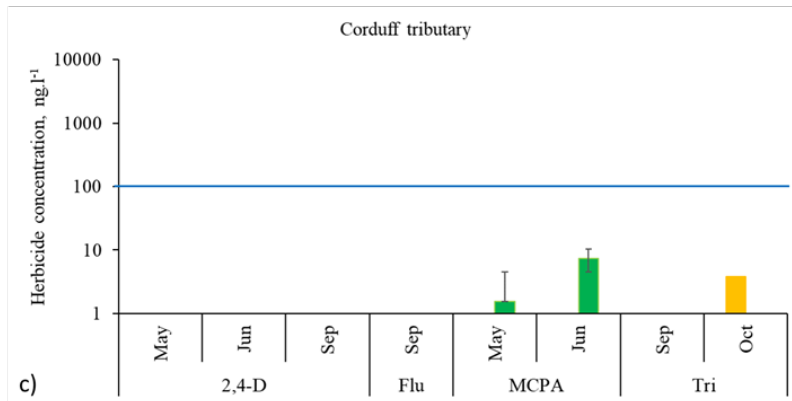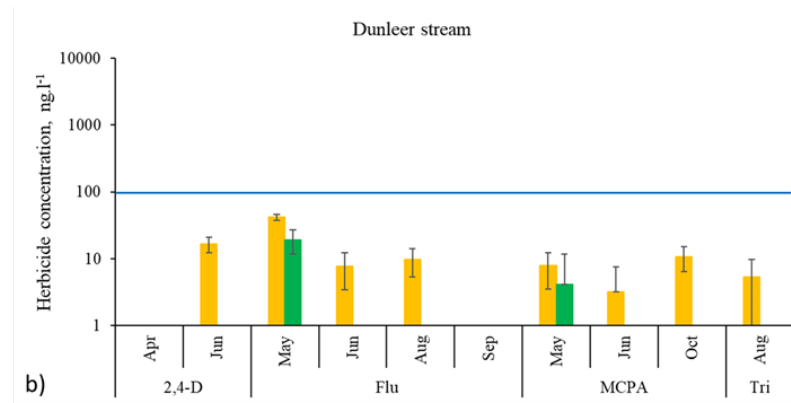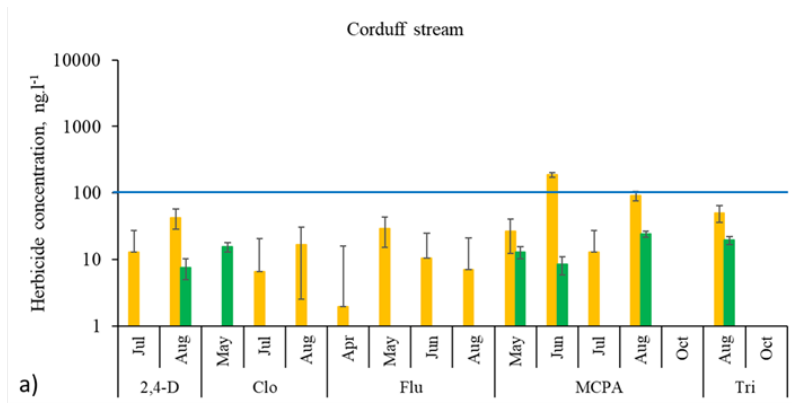

450 **Figure 5.** Herbicide detections for the filter pipe interventions across all sampling areas. Clo = clopyralid, Flu = fluroxypyr and Tri = triclopyr.
451 Yellow columns indicate herbicide concentrations before the filter pipe interventions, and green columns indicate herbicide concentrations after
452 the filter pipe interventions. Average values of the two Chemcatchers[®] have been displayed for each monthly detection. Error bars show standard
453 error where n = 2. The blue line is the maximum allowable concentration for individual herbicides (100 ng.l⁻¹).
454

455 In the Corduff tributary, only one detection was measured before the pipe, while two
456 were measured after the pipe (Fig. 5c). None of these detections were above the MAC.
457 In the Dunleer tributary, there were 39 detections of herbicides before the pipe, of
458 which eight were exceedances, while there were only 14 detections and two
459 exceedances after the filter pipe (Fig. 5d; Table S4b). The filter pipes greatly reduced
460 the herbicide concentrations ($p < 0.05$), with an average reduction of 64% (Fig. 5d).
461 In almost all the cases, the starting herbicide concentration was lower than the MAC,
462 except for MCPA in July and September, and clopyralid in September. There was a
463 measured reduction of MCPA in July from 270.1 ng.l⁻¹ to 216.7 ng.l⁻¹ (which was
464 above the MAC; Fig. 5d). However, in September, the pipe was moved from its
465 original position by the force of water coming down the tributary as a result of heavy
466 prolonged rainfall earlier that month, so no readings were obtained after the pipe for
467 that month. This month of data was, as a result, discounted from the overall reduction
468 calculations. In the case of the Dunleer tributary, the herbicide concentrations before
469 the filter pipe were reduced ($p < 0.05$) from 8.1 – 593.7 ng.l⁻¹ to between below the
470 LOD and 216.7 ng.l⁻¹.

471

472 At the Urban site, the number of herbicides detected decreased from 56 to 42, while
473 the number of exceedances decreased from 27 to 22 after the filter pipes (Fig. 5e;
474 Table S4c). There was a decrease in concentration detection ($p > 0.05$), after the filter
475 pipe, with an average reduction of 47% (no herbicides were detected after the filter
476 pipe on several occasions; Fig. 5e). The herbicide concentrations varied from 7.5 –
477 3645 ng.l⁻¹ before the filter pipe to between below the LOD and 5503 ng.l⁻¹ after the
478 pipe. When the concentrations of the herbicides were greater than 3000 ng.l⁻¹, the filter
479 pipe was unable to reduce the concentration to below the MAC (Fig. 5e).

480

481 Overall, the filter pipes reduced the exceedances from n=38 to n=24 (Table S4 (a-c)).

482 The pipe containing the intervention was 0.3 m in diameter and so could easily fit into

483 all the waterways. The filter pipes adsorbed the herbicides most efficiently when the

484 water flow was slow. From Fig. 5, it is clear that, when the concentration of herbicides

485 is $< 2500 \text{ ng.l}^{-1}$, the pipe intervention is quite capable of reducing the concentration to

486 below the MAC.

487

488 *3.5 Comparison of the filter bag and filter pipe configurations*

489

490 There are both similarities and differences between the filter bags and the filter pipes.

491 In terms of similarities, both configurations adsorbed herbicides most effectively when

492 both the water flow and the incoming herbicide concentration were low ($< 500 \text{ ng.l}^{-1}$).

493 Since both configurations used the same adsorption-based process, this is not

494 surprising. The major difference between both types of intervention was that the filter

495 pipe was better at removing herbicides than the filter bags. There was a 13% reduction

496 in the number of detections and a 24% reduction in exceedances across all sampling

497 sites when considering the filter bag interventions. This was compared to a 48%

498 reduction in detections and a 37% reduction in exceedances across all the sampling

499 sites for the filter pipe interventions. The number of reductions was statistically

500 significant ($p < 0.05$) for the filter pipes.

501

502 Varying the shape and size of the filter pipe may be an option to improve the

503 configuration of the interventions: they could be smaller and have a rectangle-shape

504 rather than a circular shape, so that multiple pipes could be used across the streams.

505 Alternatively, a larger bag within the pipe may increase the volume of the adsorbent
506 and therefore the operational life-span of the system. A second option could be to
507 physically adapt the stream environment to suit the filter pipe, by creating a narrow
508 section of the stream in order to funnel the water through the intervention.

509

510 **4. Conclusions**

511

512 This study showed that herbicides are present in high concentrations (frequently above
513 the MAC) in two agricultural catchments and one urban area in Ireland, and that the
514 majority of the exceedances occurred in April to June and September/October,
515 corresponding to the application times for these herbicides.

516

517 Two different CAC-based *in situ* remediation systems, filter bags and filter pipes,
518 capable of herbicide removal close to the source of contamination, were designed and
519 installed at the agricultural catchment areas and the urban area. Both systems operated
520 effectively when the water flow in the waterways was slow, which allowed time for
521 the adsorption of the herbicides to occur. The reduction in herbicide concentrations
522 was better for the filter pipes than for the filter bags ($p < 0.05$).

523

524 While further work on the design of the interventions is envisaged, including
525 increasing the size of the filter bags and modifying the shape of the pipe, this
526 investigation into the use of a CAC-based adsorption system for the removal of
527 herbicides at source, rather than treatment at a drinking water treatment facility, has
528 shown good potential. This further suggests that, by choosing strategic points in
529 streams and slow moving rivers for the placement of interventions, the levels of

530 herbicide contamination of water can be significantly reduced, prior to reaching
531 drinking water treatment facilities.

532

533

534 **Acknowledgements**

535

536 This project is funded under the Irish EPA Research Programme 2014-2020 (Project
537 reference number 2019-HW-LS-3). The EPA Research Programme is a Government
538 of Ireland initiative funded by the Department of Communications, Climate Action
539 and Environment. It is administered by the Environmental Protection Agency, which
540 has the statutory function of co-ordinating and promoting environmental research.

541 **DISCLAIMER:** Although every effort has been made to ensure the accuracy of the
542 material contained in this journal paper, complete accuracy cannot be guaranteed.
543 Neither the Environmental Protection Agency nor the authors accept any
544 responsibility whatsoever for loss or damage occasioned or claimed to have been
545 occasioned, in part or in full, as a consequence of any person acting or refraining from
546 acting, as a result of a matter contained in this journal paper.

547

548

549 **References**

550

551 Aksoy, E., Louwagie, G., Gardi, C., Gregor, M., Schröder, C., Löhnertz, M., 2017.

552 Assessing soil biodiversity potentials in Europe. *Sci. Total Environ.*, 589, 236-249.

553 Amiri, M. J., Roohi, R., Arshadi, M., Abbaspourrad, A., 2020. 2,4-D adsorption from

554 agricultural subsurface drainage by canola stalk-derived activated carbon: insight into

555 the adsorption kinetics models under batch and column conditions. *Environ. Sci.*

556 *Pollut. Res.*, 27, 16983-16997.

557 Butkovskiy, A., Jing, Y., Bergheim, H., Lazar, D., Gulyaeva, K., Odenmarck, S. R.,

558 Norli, H. R., Nowak, K. M., Miltner, A., Kästner, M., Eggen, T., 2021. Retention and

559 distribution of pesticides in planted filter microcosms designed for treatment of

560 agricultural surface runoff. *Sci. Total Environ.*, 778, 146114-146122.

561 Carra, I., Lozano, J. F., Autin, O., Bolton, J. R., Jarvis, P., 2020. Disinfection by-

562 product formation during UV/Chlorine treatment of pesticides in a novel UV-LED

563 reactor at 285 nm and the mitigation impact of GAC treatment. *Sci. Total Environ.*,

564 712, 136413-136422.

565 Chen, J. L., Gao, L., Jiang, Q., Hou, Q., Hong, Y., Shen, W., Wang, Y., Zhu, J. H.,

566 2020. Fabricating efficient porous sorbents to capture organophosphorus pesticide in

567 solution. *Microporous Mesoporous Mater.*, 294, 109911-109918.

568 de Souza, R. M., Seibert, D., Quesada, H. B., Bassetti, F., Fagundes-Klen, M. R.,

569 Bergamasco, R., 2020. Occurrence, impacts and general aspects of pesticides in

570 surface water: A review. *Process Saf. Environ. Prot.*, 135, 22-37.

571 Environmental Protection Agency (EPA). <https://gis.epa.ie/EPAMAPs/Water>

572 Environmental Protection Agency (EPA) & Health Service Executive (HSE), 2019.

573 *Joint Position Paper: Pesticides in Drinking Water.*

574 Environmental Protection Agency (EPA), 2022. Drinking water quality in public
575 supplies 2021.

576 European Union, 2020. *DIRECTIVE (EU) 2020/2184 of 16 December 2020 on the*
577 *quality of water intended for human consumption (recast).*

578 Feng, Y., Li, P., Wei, J., 2022. Engineering functional mesoporous materials from
579 plant polyphenol based coordination polymers. *Coord. Chem. Rev.*, 468, 214649-
580 214673.

581 Franco, D., Silva, L. F. O., da Boit Martinello, K., Diel, J. C., Georgin, J., Netto, M.
582 S., Pereira, H. A., Lima, E. C., Dotto, G. L., 2021. Transforming agricultural waste
583 into adsorbent: application of *Fagopyrum esculentum* wheat husks treated with H₂SO₄
584 to adsorption of the 2,4-D herbicide. *J. Environ. Chem. Eng.*, 9, 106872-106885.

585 Gao, W., Tang, X., Yi, H., Jiang, S., Yu, Q., Xie, X., Zhuang, R., 2023. Mesoporous
586 molecular sieve-based materials for catalytic oxidation of VOC: A review. *J. Environ.*
587 *Sci.*, 125, 112-134.

588 Grodtke, M., Paschke, A., Harzdorf, J., Krauss, M., Schüürmann, G., 2021.
589 Calibration and field application of the Atlantic HLB Disk containing Chemcatcher®
590 passive sampler – Quantitative monitoring of herbicides, other pesticides, and
591 transformation products in German streams. *J. Hazard. Mater.*, 410, 124538-124547.

592 Gustafson, D. I., 1989. Groundwater ubiquity score: a simple method of assessing
593 pesticide leachability. *Environ. Toxicol. Chem.*, 8, 339-357.

594 Herath, G. A. D., Poh, L. S., Ng, W. J., 2019. Statistical optimization of glyphosate
595 adsorption by biochar and activated carbon with response surface methodology.
596 *Chemosphere*, 227, 533-540.

597 Ighalo, J. O., Adeniyi, G. A., Adedeji A. Adelodun, A. A., 2021. Recent advances on
598 the adsorption of herbicides and pesticides from polluted waters: Performance
599 evaluation via physical attributes. *J. Ind. Eng. Chem.*, 93, 117-137.

600 Intisar, A., Ramzan, A., Sawaira, T., Kareem, A. T., Hussain, N., Din, M. I., Bilal, M.,
601 Iqbal, H. M. N., 2022. Occurrence, toxic effects, and mitigation of pesticides as
602 emerging environmental pollutants using robust nanomaterials – A review.
603 *Chemosphere*, 293, 133538- 133552.

604 Jatoi, A. S., Hashmi, Z., Adriyani, R., Yuniarto, A., Mazari, S. A., Akhter, F.,
605 Mubarak, N. M., 2021. Recent trends and future challenges of pesticide removal
606 techniques – A comprehensive review. *J. Environ. Chem. Eng.*, 9, 105571-105588.

607 Khalid, S., Shahid, M., Murtaza, B., Bibi, I., Naeem, M. A., Niazi, N. K., 2020. A
608 critical review of different factors governing the fate of pesticides in soil under biochar
609 application. *Sci. Total Environ.*, 711, 134645-134662.

610 Khan, M. A., Costa, F. B., Fenton, O., Jordan, P., Fennell, C., Mellander, P.-E., 2020.
611 Using a multi-dimensional approach for catchment scale herbicide pollution
612 assessments. *Sci. Total Environ.*, 747, 141232-141243.

613 Kodali, J., Talasila, S., Arunraj, B., Nagarathnam, R., 2021. Activated Coconut
614 Charcoal as a super adsorbent for the removal of organophosphorous pesticide
615 monocrotophos from water. *Case Stud. Chem. Environ. Eng.*, 3, 100099-100107.

616 Kouchakinejad, R., Shariati, S., Abolhasani, J., Kalhor, E. G., Vardini, M. T., 2022.
617 Core-shells of magnetite nanoparticles decorated by SBA-3-SO₃H mesoporous silica
618 for magnetic solid phase adsorption of paraquat herbicide from aqueous solutions
619 *Colloids Surf., A*, 643, 128709-128723.

620 Larasati, A., Fowler, G. D., Graham, N. J. D., 2021. Insights into chemical
621 regeneration of activated carbon for water treatment. *J. Environ. Chem. Eng.*, 9,
622 105555-105565.

623 Lewis, K. A., Tzilivakis, J., Warner, D., Green, A., 2016. An international database
624 for pesticide risk assessments and management. *Hum. Ecol. Risk Assess.*, 22, 1050-
625 1064.

626 Liu, J., Zhou, J. H., Guo, Q. N., Ma, L. Y., Yang, H., 2021. Physiochemical assessment
627 of environmental behaviors of herbicide atrazine in soils associated with its
628 degradation and bioavailability to weeds. *Chemosphere*, 262, 127830-127842.

629 McGinley, J., Healy, M. G., Ryan, P. C., Mellander, P.-E., Morrison, L., Harmon
630 O'Driscoll, J., Siggins, A., 2022. Batch adsorption of herbicides from aqueous solution
631 onto diverse reusable materials and granulated activated carbon. *J. Environ. Manage.*,
632 323, 116102-116109.

633 McGinley, J., Healy, M. G., Ryan, P. C., Harmon O'Driscoll, J., Mellander, P.-E.,
634 Morrison, L., Siggins, A., 2023. Impact of historical legacy pesticides on achieving
635 legislative goals in Europe. *Sci. Total Environ.*, 873, 162312-162324.

636 Met Éireann, 2023. www.met.ie/climate/available-data/historical-data accessed
637 05/04/2023.

638 Mojiri, A., Zhou, J. L., Robinson, B., Ohashi, A., Ozaki, N., Kindaichi, T., Farraji, H.,
639 Vakili, M., 2020. Pesticides in aquatic environments and their removal by adsorption
640 methods. *Chemosphere*, 253, 126646-126669.

641 Pandiarajan, A., Kamaraj, R., Vasudevan, S., Vasudevan, S., 2018. OPAC (orange
642 peel activated carbon) derived from waste orange peel for the adsorption of
643 chlorophenoxyacetic acid herbicides from water: Adsorption isotherm, kinetic
644 modelling and thermodynamic studies. *Bioresour. Technol.*, 261, 329-341.

645 Plohl, O., Gyergyek, S., Zemljič, L. F., 2021. Mesoporous silica nanoparticles
646 modified with N-rich polymer as a potentially environmentally-friendly delivery
647 system for pesticides. *Microporous Mesoporous Mater.*, 310, 110663-110672.

648 Postigo, C., Ginebreda, A., Barbieri, M. V., Barceló, D., Martín-Alonso, J., de la Cal,
649 A., Boleda, M. R., Otero, N., Carrey, R., Solà, V., Queralt, E., Isla, E., Casanovas, A.,
650 Frances, G., López de Alda, M., 2021. Investigative monitoring of pesticide and
651 nitrogen pollution sources in a complex multi-stressed catchment: The lower
652 Llobregat River basin case study (Barcelona, Spain). *Sci. Total Environ.*, 755, 142377-
653 142387.

654 Prosser, R. S., Hoekstra, P. F., Gene, S., Truman, C., White, M., Hanson, M. L., 2020.
655 A review of the effectiveness of vegetated buffers to mitigate pesticide and nutrient
656 transport into surface waters from agricultural areas. *J. Environ. Manage.*, 261,
657 110210-110222.

658 Ramakrishnan, B., Maddela, N. R., Venkateswarlu, K., Megharaj, M., 2021. Organic
659 farming: Does it contribute to contaminant-free produce and ensure food safety? *Sci.*
660 *Total Environ.*, 769, 145079-145097.

661 Sanz-Santos, E., Álvarez-Torrellas, S., Larriba, M., Calleja-Cascajero, D., García, J.,
662 2022. Enhanced removal of neonicotinoid pesticides present in the Decision
663 2018/840/EU by new sewage sludge-based carbon materials. *J. Environ. Manage.*,
664 313, 115020-115035.

665 Shahid, M. K., Kashif, A., Fuwad, A., Choi, Y., 2021. Current advances in treatment
666 technologies for removal of emerging contaminants from water – A critical review.
667 *Coord. Chem. Rev.*, 442, 213993-214017.

668 Silva, V., Mol, H. G. J., Zomer, P., Tienstra, M., Ritsema, C. J., Geissen, V., 2019.
669 Pesticide residues in European agricultural soils – A hidden reality unfolded. *Sci. Total*
670 *Environ.*, 653, 1532-1545.

671 Singh, M., Pandey, A., Singh, S., Singh, S. P., 2021. Iron nanoparticles decorated
672 hierarchical carbon fiber forest for the magnetic solid-phase extraction of multi-
673 pesticide residues from water samples. *Chemosphere*, 282, 131058-131066.

674 Taylor, A. C., Mills, G. A., Gravell, A., Kerwick, M., Fones, G. R., 2022. Pesticide
675 fate during drinking water treatment determined through passive sampling combined
676 with suspect screening and multivariate statistical analysis. *Water Res.*, 222, 118865-
677 118876.

678 Turf and Till, 2023. <https://turfandtill.com/best-time-to-apply-2-4-d/> accessed
679 16/02/2023.

680 Wenzel, A., Grass, I., Nölke, N., Pannure, A., Tschardtke, T., 2022. Wild bees benefit
681 from low urbanization levels and suffer from pesticides in a tropical megacity. *Agric.*
682 *Ecosyst. Environ.*, 336, 108019-108027.

683 Xu, C., Shan, Y., Bilal, M., Xu, B., Cao, L., Huang, Q., 2020. Copper ions chelated
684 mesoporous silica nanoparticles via dopamine chemistry for controlled pesticide
685 release regulated by coordination bonding. *Chem. Eng. J.*, 395, 125093-125105.

686 Zafra-Lemos, L., Cusioli, L. F., Bergamasco, R., Borin-Carvalho, L. A., de Brito
687 Portela-Castro, A. L., 2021. Evaluation of the genotoxic and cytotoxic effects of
688 exposure to the herbicide 2,4-dichlorophenoxyacetic acid in *Astyanax lacustris*
689 (Pisces, Characidae) and the potential for its removal from contaminated water using
690 a biosorbent. *Mutat. Res. Genet. Toxicol. Environ. Mutagen.*, 865, 503335-503342.

691 Zeshan, M., Bhatti, I. A., Mohsin, M., Iqbal, M., Amjed, N., Nisar, J., AlMasoud, N.,
692 Alomar, T. S., 2022. Remediation of pesticides using TiO₂ based photocatalytic
693 strategies: A review. *Chemosphere*, 300, 134525-134540.

694