



Provided by the author(s) and University of Galway in accordance with publisher policies. Please cite the published version when available.

Title	Determining Unique Fingerprint Features for Biometric Encoding of Data
Author(s)	Cucu, Catalin; Cucos, Alex; Corcoran, Peter
Publication Date	2008
Publication Information	Cucu, C. and Cucos, A. and Corcoran, P. (2008) Determining Unique Fingerprint Features for Biometric Encoding of Data Consumer Electronics, 2008. ICCE 2008. Digest of Technical Papers. International Conference on
Item record	http://hdl.handle.net/10379/3669

Downloaded 2024-03-13T10:04:29Z

Some rights reserved. For more information, please see the item record link above.



Determining Unique Fingerprint Features for Biometric Encoding of Data

Catalin Cucu, Alex Cucos and Peter Corcoran, *Member, IEEE*

Abstract — A novel approach to determining unique fingerprint features with high repeatability is described. The techniques described are particularly suitable for CE applications and devices employing inexpensive capacitive fingerprint sensors. The extraction of robust seeds for generating repeatable encryption keys is discussed and some preliminary approaches are described.

Keywords — Biometrics, Multimedia, Digital Media Encoding, Home Networks.

I. INTRODUCTION

Typical applications for biometric authentication require very accurate sensing technique with high repeatability [1] or a complex analysis technique [2] which can compensate for variations in the sensing process. Either of these approaches can yield a high level of granularity for the comparison step but with the trade-off of requiring an expensive sensing subsystem or sufficient computing power and memory to perform complex post-processing. Typical applications will also require secure access to a large database for comparing acquired and processed biometric signatures.

Our interests lie in applying authentication techniques to CE devices and services and in the use of biometrics to manage digital content and as a means for actuating the recording or duplication process for digital content [3]. These CE applications have different requirements: the strict level of authentication which is necessary for specialized business applications is simply not necessary; faster response times and greater certainty of correct user authentication are desirable. Using such modified criteria could allow biometric authentication to be built directly into the recording switch on a digital media recorder.

A useful summary of biometric techniques for fingerprint analysis and matching can be found in [4, 5].

II. FINGERPRINT MATCHING TECHNIQUES

In this paper we focus on a novel approach to extracting robust, rotation invariant features from a typical set of fingerprint minutiae. To place our work in context it is useful to quickly summarize some of the prior art in fingerprint analysis.

A. Affine Pattern Matching Techniques

Quite a few different algorithms have evolved, particularly from the field of *image registration* to determine an optimal match between two 2D point

patterns. Amongst the most recent approaches we mention the *iterative closest point algorithm* (ICP) described in [8].

The basic ICP algorithm has been extended by a number of authors. For example, in [9] it is extended to handle correspondence between a point and a tangent plane to overcome the lack of an exact correspondence between the two point sets; in [11, 13] the algorithm is made more robust to the influence of outliers and features lacking correspondence; in [10] a weighted least mean error estimate is employed and in [12] a metric is employed which trades off distance against feature similarity based on local shape invariance. For real-time applications [14] examines performance improvements to the basic algorithm.

Another recent approach to such problems is that of *thin plate spline* (TPS) matching algorithms [15, 16] which are robust to false positive-negative candidate spots and unknown non-affine warpings between the candidate point sets. This algorithm works by iteratively performing a joint estimation of the correspondence between two sets of points which are to be registered, and the TPS mapping between the images that the points lie in.

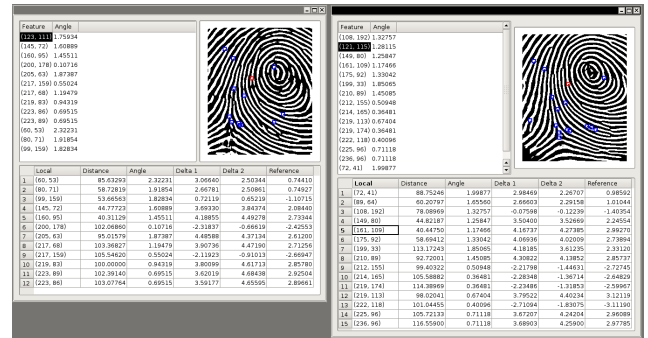


Fig 1: User Interface to our Fingerprint Analysis Tools

Although we have tested some of the above algorithms we reached a conclusion that such algorithms are flawed for our purpose as they assume a correspondence between the two point sets to be matched. Thus they are not optimized to indicate quickly when point sets are unlikely to allow a good match.

B. Ridge Field Pattern Matching Approaches

An alternative approach to fingerprint pattern matching is provided by analyzing the *ridge-field pattern* of an acquired fingerprint. This provides useful global information which is additional to the *minutiae* points and which is relatively robust to the quality of image acquisition [22]. When combined with local, *minutiae* based features the use of this orientation field data can provide both accurate and robust matching [21]. However

This work is supported under the CFTD Program (CFTD/2004/206) of Enterprise Ireland under the National Development Plan.

Peter Corcoran is with the Dept. Electronic Engineering, National University of Ireland, Galway (e-mail: peter.corcoran@nuigalway.ie).

the algorithms proposed by these authors are too slow for consumer applications which require real-time responses (i.e. < 5 seconds) and are better suited to forensic matching applications rather than for use in embedded CE systems which require realistic response times.

C. Minutiae Triangle Descriptors

A number of authors have turned their attention to an alternative approach to the matching of fingerprint patterns [17-20] based on the use of local triangular features formed from nearest-neighbor *minutiae* groupings. In [17] the author builds a connected graph composed of triangles formed from nearest-neighbor *minutiae* with shared edges. By allowing for small localized variations in the lengths of the shared edges this matching technique can account for global variations of up to 45% across the entire fingerprint. The authors of [18] use localized matching of *minutiae* pairs combined with a global matching. They use the best matched local structure pair to determine a global translation and rotation for the remaining *minutiae* and perform their overall decision based on the resulting match of the global *minutiae* set. In [19] the authors employ fuzzy similarity measures for determining matches between individual local triangle features and combine these to obtain a global measure of similarity between two fingerprints. Finally, the authors of [20] build a set of triangle descriptor feature vectors for each fingerprint and then proceed to determine if the triangular frameworks for each fingerprint correspond closely enough to declare a match. Their technique is differentiated from that of [18] as it is not necessary to perform a global alignment of the *minutiae* patterns. Furthermore, where additional local *ridge-field* data is used the discriminating power of these local triangular features is somewhat improved and these features are essentially rotation-invariant. An example of this modified triangular descriptor is given in **Fig 2** below.

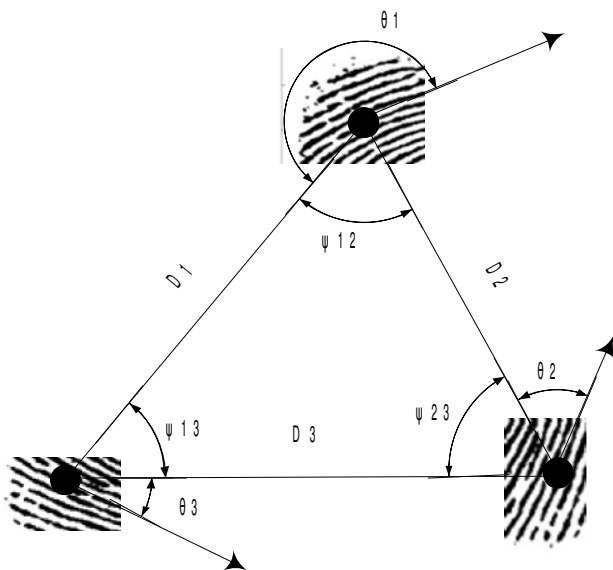


Fig 2: Local Triangle Descriptor formed by 3 Minutiae Points

One weakness in the use of such triangular descriptors, and indeed for all of the above techniques is that they are

susceptible to erroneous acquisition data. If a single *minutiae* point is omitted, or is incorrectly detected as two adjacent *minutiae* then the pattern matching algorithm will often fail. This is not a problem for most authentication scenarios as the user can simply re-apply their fingerprint, paying more attention to the pressure and duration of the acquisition process. However in a consumer application it is desirable that even if the acquisition process is poorly executed there is still a high probability of a successful outcome.

III. USB FINGERPRINT SENSOR

For our initial system development the DKF200 software development kit from Fujitsu Inc was used with the MBF200 fingerprint sensor to implement the fingerprint scanning subsystem. The DKF200 kit includes supporting software libraries, however these did not provide access to raw image data of acquired fingerprints so we developed our own device driver and generic image processing algorithms to enable direct access and post-processing of fingerprint images [6, 7].

One disadvantage of a low resolution capacitive sensor such as the MBF200 is that the determination of a repeatable *minutiae* set is problematic. This can be readily understood if we realize that fingerprint ridges and ridge junctions are of finite thickness and in some scans certain ridges and junctions may be too thin, or be split across adjacent pixels and may not be correctly registered by such a low resolution sensor. As stated above, the high probability that at least some *minutiae* will be missed, or other erroneous *minutiae* will be registered on subsequent fingerprint scans presents a significant barrier to the use of low-cost fingerprint sensors in CE applications.

IV. DETERMINATION OF UNIQUE AND ROBUST FEATURES

Bearing the above considerations in mind we have developed a novel approach to extracting repeatable fingerprint features from the unreliable *minutiae* feature sets which occur when low-resolution fingerprint sensors are employed for biometric authentication or encoding applications. Our approach draws inspiration partly from the local triangular features described by the authors of [20]. To overcome the problem of unreliable *minutiae* we only require that a repeatable feature consists of two corresponding *minutiae*, and each *minutiae* point may be analyzed in terms of the set of features it shares with its neighboring *minutiae* points. This is illustrated in **Fig 3** below.

A. Enrollment Process

To properly determine a set of such repeatable two-point features we employ a multi-stage enrollment where the user must provide a set of, typically, 4-6 fingerprint scans. After each scan the set of determined features is classified into a set of angle and distance bins. *Minutiae* are matched across the set of scans – this is easily achieved by a comparison of the extracted feature sets. Then the

most repeatable features from each minutiae are recorded across the set of enrollment scans.

Neighbor	Distance	Neighbor Angle	Self Angle
A	A	284.1°	50.1°
B	B	209.7°	143.2°
C	C	296.9°	242.6°

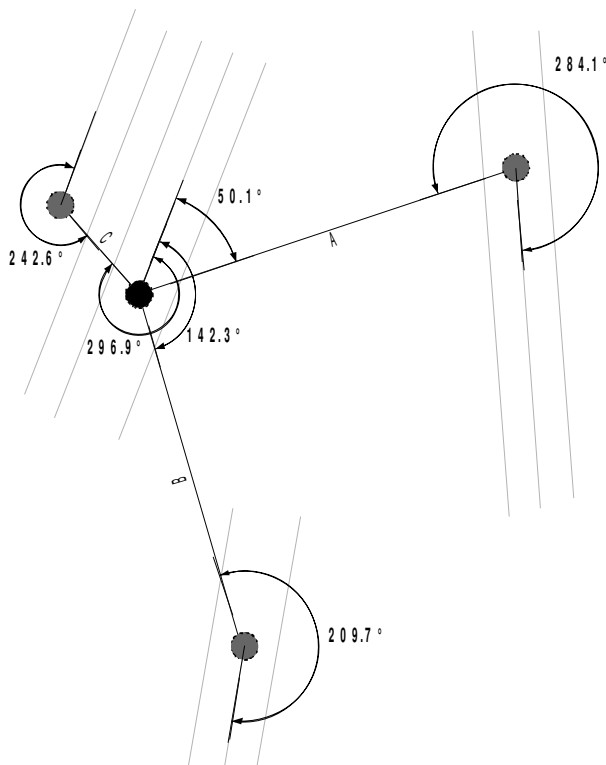


Fig 3: A minutiae and its three nearest neighbours.

Where a scan is of poor quality or yields a significantly higher or lower number of minutiae points it is rejected and the enrollee is requested to enter additional enrollment scans as necessary.

At the end of the enrollment process the most reliable two-point features are determined. Minutiae points which have at least 2 high-reliability features associated with them are retained within the enrollment set. In this way we typically obtain 3-4 minutiae points and 6-10 high reliability two-point features. The resulting enrollment data set is not unduly large and facilitates fast authentication or the generation of repeatable encryption keys.

B. Matching Process

The corresponding matching process involves obtaining a single fingerprint scan. The associated set of minutiae are analyzed for two-point features. Typically we begin at the central minutiae points and work outwards. A set of features is extracted for each minutiae point and compared with the enrolled features.

For CE applications, such as media encoding [5] it is typically sufficient to match two features on a common minutiae, or to match three across different minutiae.

When applications are more security conscious it may be required to match a larger number of features.

REFERENCES

- [1] http://bio-tech-inc.com/Bio_Tech_Assessment.html
- [2] Yongdong Wu, Feng Bao, Robert H. Deng, *Secure Human Communications Based On Biometrics Signals*, 20th IFIP International Information Security Conference (SEC 2005), pp.205-221, Chiba, Japan, May 30 - June 1, 2005
- [3] Corcoran, P., and Cucos, A.; Techniques for securing multimedia content in consumer electronic appliances using biometric signatures, *IEEE Transactions on Consumer Electronics*, Vol. 51, No. 2, pp. 545-551, May 2005
- [4] D. Maltoni, D. Maio, A.K. Jain, S. Prabhakar, *Handbook of Fingerprint Recognition*; Springer, 2003
- [5] P. Corcoran, C. Iancu, F. Callaly, M. Leyden and A. Cucos, "Biometric Access Control for Digital Media Streams in Home Networks", *IEEE Trans. on Consumer Electronics*, submitted
- [6] P. Corcoran, C. Cucu, and A. Cucos, "Fingerprint Authentication System for CE Appliances", *IEEE Trans. on Consumer electronics*, submitted
- [7] L. Hong, Y. Wan and A. Jain, "Fingerprint Image Enhancement: Algorithm and Performance Evaluation", *IEEE PAMI*, Vol 20, No. 8, 1998
- [8] P. J. Besl and N. D. McKay. A method for registration of 3-d shapes. *IEEE Trans. Pat. Anal. and Mach. Intel.* 14(2), pp 239-256, Feb 1992.
- [9] Y. Chen, G. G. Medioni. Object modelling by registration of multiple range images. *Image and Vision Comp.* 10(3), pp 145-155, 1992.
- [10] C. Dorai, J. Weng, A. K. Jain. Optimal registration of object views using range data. *IEEE Trans. Pat. Anal. and Mach. Intel.* 19(10), pp 1131-1138, Oct 1997.
- [11] T. Masuda, N. Yokoya. A robust method for registration and segmentation of multiple range images. *Comp. Vision and Image Under.* 61(3), pp 295-307, May 1995.
- [12] G. C. Sharp, S. W. Lee, D. K. Wehe. Invariant features and the registration of rigid bodies. *Proc. IEEE Int. Conf. on Robotics and Autom.*, pp 932-937, 1999.
- [13] Z. Y. Zhang. Iterative point matching for registration of free-form curves and surfaces. *Int. J. of Computer Vision*, 13(2), pp 119-15, Oct. 1994.
- [14] S. Rusinkiewicz and M. Levoy, Efficient Variants of the ICP Algorithm, *Proceedings of the 3rd International Conference on 3D Digital Imaging and Modeling*, pp145-152, Quebec, Canada, May 2001.
- [15] H. Chui. Non-Rigid PointMatching: Algorithms, Extensions and Applications. PhD thesis, Yale University, 2001.
- [16] H. Chui and A. Rangarajan. A new algorithm for non-rigid point matching. *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2:44-51, 2000.
- [17] Z. M. Kovacs-Vajna, A fingerprint verification system based on triangular matching and dynamic time warping, *IEEE Transactions on Pattern Analysis and Machine Intelligence*, Vol 22, No. 11, p. 1266-1276, Nov 2000.
- [18] X. Jiang, and Y-W, Yau, Fingerprint minutiae matching based on the local and global structures, *Proceedings of 15th International Conference on Pattern Recognition*, p 1038-1041, 2000.
- [19] X. Chen, J. Tian, X. Yang, and Y. Zhang, An algorithm for distorted fingerprint matching based on local triangle feature set.
- [20] X. Zhao, Y. Wang, J. Qi, and X. Zheng, Non-Alignment Fingerprint Matching Based on Local and Global Information, *Proceedings of the First IEEE International Conference on Innovative Computing, Information and Control (ICICIC)*, 2006.
- [21] J. Gu, J. Zhou, and C. Yang, Fingerprint Recognition by Combining Global Structure and Local Cues, *IEEE Transactions on Image Processing*, Vol 15, No 7, p. 1952-64, July 2006.
- [22] A. N. Marana, and A. K. Jain, Ridge based fingerprint matching using Hough Transform, *Proceedings of the XVIII Brazilian Symposium on Computer Graphics and Image Processing (SIBGRAPI '05)*, 2005.